



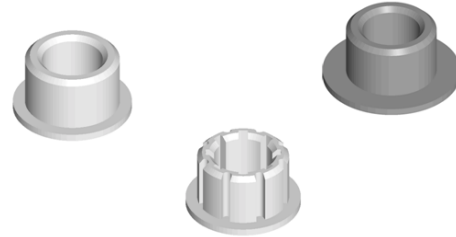

Molding Today's Ideas for Tomorrow's Solutions

www.aucilla.com
574-234-9036

Bearings and Bushings: Flanged and Solid Style



PART NO.	A	B	C	D	E	Material
H-467*	0.960	0.093	0.719	0.636	0.870	Natural Acetal
G-467	1.250	0.093	0.500	0.650	0.870	Nylon 6/6
LS-183AL	1.250	0.062	0.562	0.695	1.125	Natural Acetal
LS-113-2629	1.500	0.093	0.790	0.448	1.197	Natural Acetal
LS-113	1.500	0.093	0.790	0.515	1.197	Natural Acetal
LS-112	1.500	0.093	0.790	0.640	1.197	Natural Acetal
LS-112SP	1.500	0.200	0.880	0.640	1.197	Natural Acetal
LS-111-2151	1.500	0.093	0.790	0.760	1.197	Black Acetal
LS-111	1.500	0.093	0.790	0.770	1.197	Natural Acetal
LS-111-2232	1.500	0.093	0.790	0.770	1.197	Nylon 4/6 (High Temp)
2429	1.500	0.093	0.790	0.770	1.197	Natural Acetal
LS-167*	1.545	0.100	0.785	1.005	1.385	Natural Acetal
LS-167BLK*	1.545	0.100	0.785	1.005	1.385	Black Acetal
LS-166*	1.545	0.100	0.780	0.885	1.385	Natural Acetal
LS-167A*	1.550	0.110	0.720	1.040	1.389	Natural Acetal